


## MF 3" COB Down Light Specification

**Model NO.:MF-E300098**



Cut out:

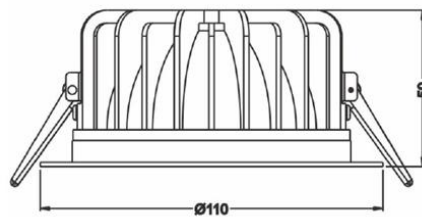

Fixed COB Series  
**UGR:19 KN<10% CRI>83**



IEC62031  
 IEC60598-1  
 IEC60598-2  
 IEC61347  
 Comply with Energy Star SSL




**Product SPEC:**

<b>Input voltage</b>	220-240Vac, 50hz/60hz
<b>Product Size</b>	D109*52mm
<b>Cut out Size</b>	∅ 98mm
<b>Power(watt)</b>	10W/ 12W
<b>Color temperature</b>	3000K / 4000K / 6000K
<b>LED Chip</b>	Cree COB/ Epistar COB
<b>LED Driver</b>	Lifud (IP44) / Meanwell (IP65)
<b>PF</b>	≥0.95
<b>Housing Colour</b>	White RAL9003
<b>Luminous Flux (lm)</b>	10W: 800lm@3000K, 900lm@4000K, 960lm@5000K 12W: 960lm@3000K, 1000lm@4000K, 1100lm@5000K
<b>CRI (Ra)</b>	>83
<b>Lifespan</b>	≥50000hrs
<b>Beam Angle</b>	40°
<b>Material</b>	Aluminum
<b>Operating Temperature</b>	-20°C ~50°C
<b>Dimmable</b>	Y
<b>IP</b>	IP44/IP65
<b>Certificate</b>	CE/ RoHS
<b>Warranty Period</b>	3 years


**Package:**




**Packing Size: (CM)**



**16(D1)\*16 (F1)\*9cm(H1)/PCS**  
**N.W: 0.55KG, G.W: 0.64KG**

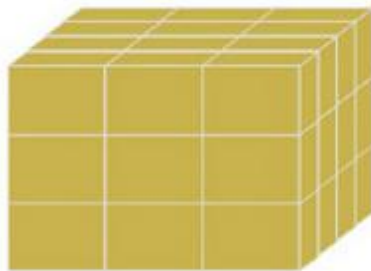

**24PCS/CTN**

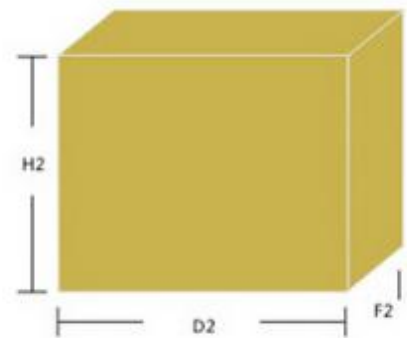

**56(D2)\*36(F2)\*40cm(H2)/24PCS**  
**N.W: 14.6KG, G.W: 16.7KG**

**Job reference photos from Ming Feng**

